



Construction Material:	Fibre Reinforced Plastic (FRP) (Fibreglass)
Average Construction Thickness:	15mm (including foam core)
Floor Stiffening:	Included (Overall floor thickness approx 18mm)
Number of Components:	Eight (8)
Construction Procedure:	Bolted together (using 6 mm x 25mm hex head bolts @ 400mm maximum centers)
Weight:	TBA
Internal Finish:	Smooth Gel Coat (White)
Sub-Floor Requirements:	Firm Flat Surface (Concrete floor, timber floor, directly onto joists, chassis or similar)
Left or Right Hand Shower:	Suited to either by rotation of floor
Door opening :	700 mm wide
Fittings Package Available:	Yes
Suitable for Glass Shower Screens:	Yes
Suitable for Windows:	Yes
Installation Service:	Yes


SIDE ELEVATION

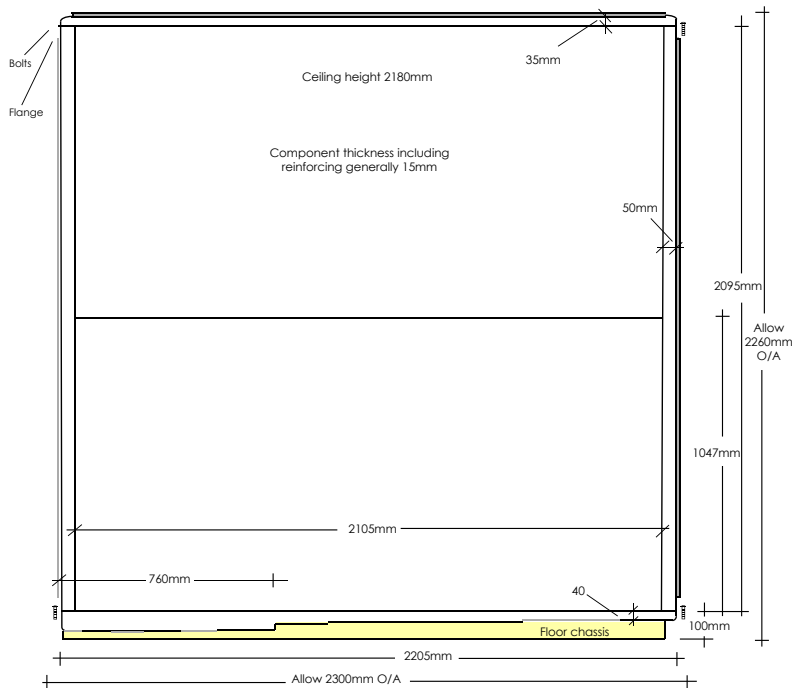

END ELEVATION

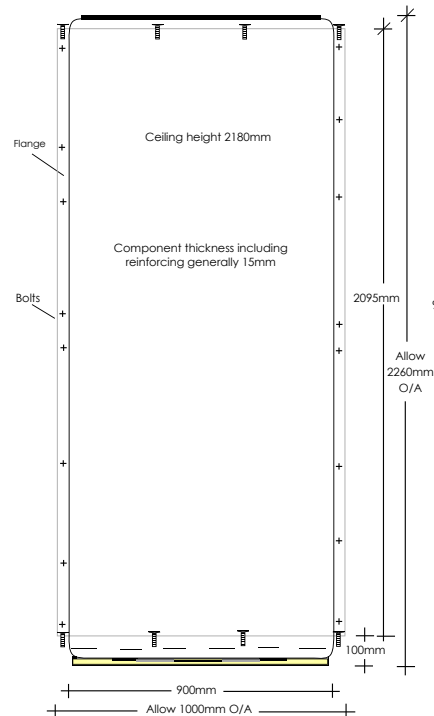

FLOOR PLAN

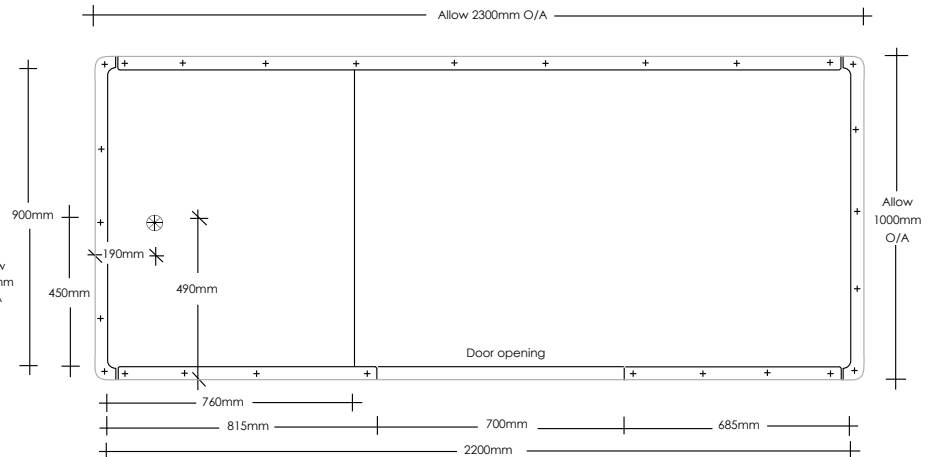

**NOTE: DO NOT SCALE DRAWINGS**